

## Discussion 6B

The following notes are useful for this discussion: [Note 9](#), [Note 10](#)

### 1. System Identification by Means of Least Squares

(a) Consider the scalar discrete-time system

$$x[i+1] = ax[i] + bu[i] + w[i] \quad (1)$$

Where the scalar state at timestep  $i$  is  $x[i]$ , the input applied at timestep  $i$  is  $u[i]$  and  $w[i]$  represents some (small) external disturbance that also participated at timestep  $i$  (which we cannot predict or control, it's a purely random disturbance).

Assume that you have measurements for the states  $x[i]$  from  $i = 0$  to  $\ell$  and also measurements for the controls  $u[i]$  from  $i = 0$  to  $\ell - 1$ . Further assume  $\ell \geq 2$ .

**Show that we can set up a linear system as in eq. (2) to find constants  $a$  and  $b$ . How do we solve this system?**

$$\underbrace{\begin{bmatrix} x[1] \\ x[2] \\ \vdots \\ x[\ell] \end{bmatrix}}_{\vec{s}} \approx \underbrace{\begin{bmatrix} x[0] & u[0] \\ x[1] & u[1] \\ \vdots & \vdots \\ x[\ell-1] & u[\ell-1] \end{bmatrix}}_D \underbrace{\begin{bmatrix} a \\ b \end{bmatrix}}_{\vec{p}} \quad (2)$$

**Solution:** Our model is of the form

$$x[i+1] = ax[i] + bu[i] + w[i] \quad (3)$$

where  $w[i]$  is our error term and we are interested in  $a$  and  $b$ . Since we cannot predict the disturbance  $w[i]$  (and therefore cannot have a parameter in our solution associated with the effect of the disturbance on our system), we will solve the adjusted equation in eq. (4).

$$x[i+1] \approx ax[i] + bu[i] \quad (4)$$

We have measurements from  $i = 1$  to  $i = m$ , and so our least squares formulation is:

$$\underbrace{\begin{bmatrix} x[1] \\ x[2] \\ \vdots \\ x[\ell] \end{bmatrix}}_{\vec{s}} \approx \underbrace{\begin{bmatrix} x[0] & u[0] \\ x[1] & u[1] \\ \vdots & \vdots \\ x[\ell-1] & u[\ell-1] \end{bmatrix}}_D \underbrace{\begin{bmatrix} a \\ b \end{bmatrix}}_{\vec{p}} \quad (5)$$

$D$  is not necessarily a square matrix (it is tall), so we cannot invert it and solve for  $\vec{p}$ . Hence, we use least squares like previously mentioned. Thus, our best approximation for  $\vec{p}$  is

$$\hat{\vec{p}} = (D^T D)^{-1} D^T \vec{s} \quad (6)$$

Since we are using least squares, we can also group our estimation error (remember,  $\hat{\vec{p}} \neq \vec{p}$  necessarily) into  $w[i]$ .

- (b) What if there were now two distinct scalar inputs to a scalar system

$$x[i+1] = ax[i] + b_1u_1[i] + b_2u_2[i] + w[i] \quad (7)$$

and that we have measurements as before, but now also for both of the control inputs.

**Set up a least-squares problem that you can solve to get an estimate of the unknown system parameters  $a, b_1, b_2$ .**

**Solution:** Our new model is of the form

$$x[i+1] = ax[i] + b_1u_1[i] + b_2u_2[i] + w[i] \quad (8)$$

where  $w[i]$  is our error term and we are interested in  $a, b_1, b_2$ . As we did before, we will modify the system and drop the disturbance term, converting the equality to an approximation.

$$x[i+1] \approx ax[i] + b_1u_1[i] + b_2u_2[i] \quad (9)$$

As before, we have  $[1, m]$  measurements, and so our least squares formulation is:

$$\underbrace{\begin{bmatrix} x[1] \\ x[2] \\ \vdots \\ x[\ell] \end{bmatrix}}_{\vec{s}} \approx \underbrace{\begin{bmatrix} x[0] & u_1[0] & u_2[0] \\ x[1] & u_1[1] & u_2[1] \\ \vdots & \vdots & \vdots \\ x[\ell-1] & u_1[\ell-1] & u_2[\ell-1] \end{bmatrix}}_D \underbrace{\begin{bmatrix} a \\ b_1 \\ b_2 \end{bmatrix}}_{\vec{p}} \quad (10)$$

- (c) **What could go wrong in the previous case? For what kind of inputs would make least-squares fail to give you the parameters you want?**

**Solution:** We can take a look at the least squares formula, and think about what the possible failure points are.

$$\hat{\vec{p}} = (D^T D)^{-1} D^T \vec{s}. \quad (11)$$

In this equation, the likely point of failure is the inversion of  $D^T D$ ; the other operations (matrix-matrix multiplications, matrix-vector multiplications) do not have the same issue.

$D^T D$  might not be invertible when  $D$  has columns that are not linearly independent. For example, it could be because the inputs  $\vec{u}_1$  and  $\vec{u}_2$  are too similar, as if  $\vec{u}_1 = \alpha \vec{u}_2$ . We need these two inputs to be different and sufficiently varied so that least-squares does not fail.

- (d) Now consider the two dimensional state case with a single input.

$$\vec{x}[i+1] = \begin{bmatrix} x_1[i+1] \\ x_2[i+1] \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \vec{x}[i] + \begin{bmatrix} b_1 \\ b_2 \end{bmatrix} u[i] + \vec{w}[i] \quad (12)$$

**How can we treat this like two parallel problems to set this up using least-squares to get estimates for the unknown parameters  $a_{11}, a_{12}, a_{21}, a_{22}, b_1, b_2$ ?** Write the least squares solution in terms of your known matrices and vectors (including based on the labels you gave to various matrices/vectors in previous parts). *Hint: What work/computation can we reuse across the two problems?*

**Solution:** We can rewrite eq. (12) as

$$\begin{bmatrix} x_1[i+1] \\ x_2[i+1] \end{bmatrix} = \begin{bmatrix} a_{11}x_1[i] + a_{12}x_2[i] + b_1u[i] \\ a_{21}x_1[i] + a_{22}x_2[i] + b_2u[i] \end{bmatrix} \quad (13)$$

We can set up a problem to solve for  $a_{11}, a_{12}, b_1$  (call this subsystem 1) and another problem to solve for  $a_{21}, a_{22}, b_2$  (call this subsystem 2). We can rewrite the first row of eq. (13) as

$$x_1[i+1] = [x_1[i] \quad x_2[i] \quad u[i]] \begin{bmatrix} a_{11} \\ a_{12} \\ b_1 \end{bmatrix} \quad (14)$$

and likewise for the second row

$$x_2[i+1] = [x_1[i] \quad x_2[i] \quad u[i]] \begin{bmatrix} a_{21} \\ a_{22} \\ b_2 \end{bmatrix} \quad (15)$$

To find the unknowns in subsystem 1, we can set up the following least squares problem:

$$\underbrace{\begin{bmatrix} x_1[1] \\ x_1[2] \\ \vdots \\ x_1[\ell] \end{bmatrix}}_{\vec{s}_1} \approx \underbrace{\begin{bmatrix} x_1[0] & x_2[0] & u[0] \\ x_1[1] & x_2[1] & u[1] \\ \vdots & \vdots & \vdots \\ x_1[\ell-1] & x_2[\ell-1] & u[\ell-1] \end{bmatrix}}_{D_1} \underbrace{\begin{bmatrix} a_{11} \\ a_{12} \\ b_1 \end{bmatrix}}_{\vec{p}_1} \quad (16)$$

Now, to find the unknowns in subsystem 2, we can set up the following least squares problem:

$$\underbrace{\begin{bmatrix} x_2[1] \\ x_2[2] \\ \vdots \\ x_2[\ell] \end{bmatrix}}_{\vec{s}_2} \approx \underbrace{\begin{bmatrix} x_1[0] & x_2[0] & u[0] \\ x_1[1] & x_2[1] & u[1] \\ \vdots & \vdots & \vdots \\ x_1[\ell-1] & x_2[\ell-1] & u[\ell-1] \end{bmatrix}}_{D_2} \underbrace{\begin{bmatrix} a_{21} \\ a_{22} \\ b_2 \end{bmatrix}}_{\vec{p}_2} \quad (17)$$

Notice that  $D_1 = D_2$ . Hence, we can write  $D = D_1 = D_2$ , and we only need to compute  $(D^\top D)^{-1} D^\top$  once. Hence, the solution for the  $i$ th subsystem (for  $i \in \{1, 2\}$ ) is

$$\hat{p}_i = (D^\top D)^{-1} D^\top \vec{s}_i \quad (18)$$

Furthermore, we can horizontally stack the two separate problems for each subsystem as follows:

$$\underbrace{\begin{bmatrix} x_1[1] & x_2[1] \\ x_1[2] & x_2[2] \\ \vdots & \vdots \\ x_1[\ell] & x_2[\ell] \end{bmatrix}}_S \approx \underbrace{\begin{bmatrix} x_1[0] & x_2[0] & u[0] \\ x_1[1] & x_2[1] & u[1] \\ \vdots & \vdots & \vdots \\ x_1[\ell-1] & x_2[\ell-1] & u[\ell-1] \end{bmatrix}}_D \underbrace{\begin{bmatrix} a_{11} & a_{21} \\ a_{12} & a_{22} \\ b_1 & b_2 \end{bmatrix}}_P \quad (19)$$

Finally, solving this as a single least squares problem gives us

$$\hat{P} = (D^\top D)^{-1} D^\top S \quad (20)$$


## 2. Stability Examples and Counterexamples

- (a) Consider the circuit below with  $R = 1 \Omega$ ,  $C = 0.5 F$ , and  $u(t)$  is some function bounded between  $-K$  and  $K$  for some constant  $K \in \mathbb{R}$  (for example  $K \cos(t)$ ). Furthermore assume that  $v_C(0) = 0 V$  (that the capacitor is initially discharged).

This circuit can be modeled by the differential equation

$$\frac{dv_C(t)}{dt} = -2v_C(t) + 2u(t) \quad (21)$$

**Show that the differential equation is always stable (that is, as long as the input  $u(t)$  is bounded,  $v_C(t)$  also stays bounded).** Consider what this means in the physical circuit. *HINT:*

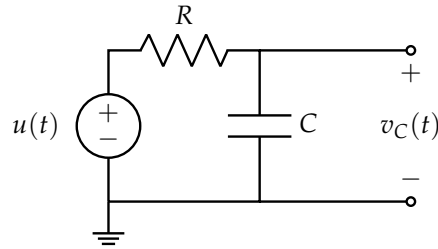

You may want to use the triangle inequality, i.e.  $|a + b| \leq |a| + |b|$ , and the triangle inequality for integrals, i.e.  $\left| \int_a^b f(x) dx \right| \leq \int_a^b |f(x)| dx$ . When we use  $|\cdot|$  notation here, we will take this to mean the magnitude, rather than the absolute value (since we can be dealing with complex numbers).

**Solution:** We can apply the integral solution for a nonhomogeneous differential equation to demonstrate boundedness of the solution. The general solution to  $\frac{dx(t)}{dt} = \lambda x(t) + bu(t)$  is  $x(t) = x_0 e^{\lambda t} + \int_0^t e^{\lambda(t-\theta)} bu(\theta) d\theta$ . Here, we can say that:

$$v_C(t) = v_C(0)e^{-2t} + \int_0^t e^{-2(t-\theta)} 2u(\theta) d\theta \quad (22)$$

$$= v_C(0)e^{-2t} + 2 \int_0^t e^{-2(t-\theta)} u(\theta) d\theta \quad (23)$$

We wish to show  $|v_C(t)| \leq M$  for all  $t \geq 0$ , where  $M \in \mathbb{R}$  is some constant (this is another way to say that something is “bounded”). We can take the absolute value around eq. (23) as follows:

$$|v_C(t)| = \left| v_C(0)e^{-2t} + 2 \int_0^t e^{-2(t-\theta)} u(\theta) d\theta \right| \quad (24)$$

$$\leq \left| v_C(0)e^{-2t} \right| + \left| 2 \int_0^t e^{-2(t-\theta)} u(\theta) d\theta \right| \quad (25)$$

$$\leq \left| v_C(0)e^{-2t} \right| + 2 \int_0^t \left| e^{-2(t-\theta)} u(\theta) \right| d\theta \quad (26)$$

$$= |v_C(0)|e^{-2t} + 2 \int_0^t e^{-2(t-\theta)} |u(\theta)| d\theta \quad (27)$$

where we use the traditional triangle inequality to obtain eq. (25) and the integral triangle inequality to obtain eq. (26). We know  $v_C(0) = 0$ , so the first term is 0. Even if it is nonzero, we may assume that it is some finite constant. Furthermore,  $0 \leq e^{-2t} \leq 1$  for  $t \geq 0$  (it is a decaying exponential). Hence, the  $|v_C(0)|e^{-2t}$  term is bounded. Next, we are allowed to assume that  $|u(t)| \leq K$  from the statement of the problem. This will let us obtain

$$|v_C(t)| \leq 2 \int_0^t e^{-2(t-\theta)} \underbrace{|u(\theta)|}_{\leq K} d\theta \quad (28)$$

$$\leq 2K \int_0^t e^{-2(t-\theta)} d\theta \quad (29)$$

$$= K(1 - e^{-2t}) \quad (30)$$

Because  $e^{-2t} \geq 0$ ,  $1 - e^{-2t} \leq 1$ . Hence,  $|v_C(t)| \leq K$  so  $v_C(t)$  is bounded.

- (b) **(PRACTICE)** Now, suppose that in the circuit of part 2.a we replaced the resistor with an inductor as in fig. 1.

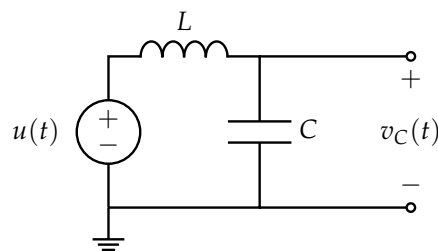


Figure 1: The original circuit with an inductor in place of the resistor.

Let  $L = 1$  mH. Repeat part 2.a for the new circuit (with an inductor). Consider the following process to arrive at the result:

- i. Derive the system of differential equations using KCL, KVL, and NVA. Show that the system is  $\frac{d}{dt} \begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix} = \begin{bmatrix} 0 & \frac{1}{C} \\ -\frac{1}{L} & 0 \end{bmatrix} \begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix} + \begin{bmatrix} 0 \\ \frac{1}{L} \end{bmatrix} u(t)$  with the initial condition being  $\begin{bmatrix} v_C(0) \\ i_L(0) \end{bmatrix} = \vec{0}$ .
- ii. Solve the matrix differential equation, using diagonalization if needed. Show that the diagonalized system has a solution

$$\vec{y}(t) = \begin{bmatrix} \frac{1}{2LC} e^{j\frac{1}{\sqrt{LC}}t} \int_0^t e^{-j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \\ \frac{1}{2LC} e^{-j\frac{1}{\sqrt{LC}}t} \int_0^t e^{j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \end{bmatrix} \quad (31)$$

where  $\vec{y}(t) = V^{-1} \begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix}$  for change of basis matrix  $V$ . You may use the fact that the eigenvalue, eigenvector pairs of  $\begin{bmatrix} 0 & \frac{1}{C} \\ -\frac{1}{L} & 0 \end{bmatrix}$  are  $\left( j\frac{1}{\sqrt{LC}}, \begin{bmatrix} -j\sqrt{\frac{L}{C}} \\ 1 \end{bmatrix} \right)$  and  $\left( -j\frac{1}{\sqrt{LC}}, \begin{bmatrix} j\sqrt{\frac{L}{C}} \\ 1 \end{bmatrix} \right)$ .

- iii. Apply a similar process from part 2.a to show that, if we have a bounded input  $u(t)$ , then the system can grow unboundedly. When showing that a system is unstable, it suffices to choose a bounded  $u(t)$  that makes the system unbounded. We can choose  $u(t) = 2 \cos\left(\frac{1}{\sqrt{LC}}t\right) = e^{j\frac{1}{\sqrt{LC}}t} + e^{-j\frac{1}{\sqrt{LC}}t}$ <sup>1</sup>. HINT: You may use the fact that  $i_L(t) = y_1(t) + y_2(t)$ .

Hint: You might find it useful to revisit the process of generating the state-space equations for  $v_C(t)$  and  $i_L(t)$  as done in Note 4 for the LC Tank. The difference is that here, we have an input voltage.

**Solution: 2.(b)i:**

First, we begin forming the vector state-space equation, which involves relating  $v_C(t)$  and  $i_L(t)$  to their derivatives and the input voltage.

$$C \frac{dv_C(t)}{dt} = i_C(t) = i_L(t) \quad (32)$$

$$\implies \frac{dv_C(t)}{dt} = \frac{1}{C} i_L(t) \quad (33)$$

$$L \frac{di_L(t)}{dt} = v_L(t) = u(t) - v_C(t) \quad (34)$$

$$\implies \frac{di_L(t)}{dt} = \frac{1}{L} v_L(t) = -\frac{1}{L} v_C(t) + \frac{1}{L} u(t) \quad (35)$$

Combining this info, we find:

$$\frac{d}{dt} \begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix} = \underbrace{\begin{bmatrix} 0 & \frac{1}{C} \\ -\frac{1}{L} & 0 \end{bmatrix}}_A \underbrace{\begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix}}_{\vec{x}(t)} + \underbrace{\begin{bmatrix} 0 \\ \frac{1}{L} \end{bmatrix}}_{\vec{b}} u(t) \quad (36)$$

<sup>1</sup>The natural frequency of this system is  $\omega_n = \frac{1}{\sqrt{LC}}$ . If we excite this system at a period equal to the natural frequency, we can make it grow unboundedly. This is similar to pushing a swing at the same rate it swings, which makes it swing farther.

2.(b)ii:

This is not a diagonal system, so we have to diagonalize it first. We start by solving for the eigenvalues and eigenvectors of  $A$ :

$$\lambda_1 = j\frac{1}{\sqrt{LC}} \quad \vec{v}_1 = \begin{bmatrix} -j\sqrt{\frac{L}{C}} \\ 1 \end{bmatrix} \quad (37)$$

$$\lambda_2 = -j\frac{1}{\sqrt{LC}} \quad \vec{v}_2 = \begin{bmatrix} j\sqrt{\frac{L}{C}} \\ 1 \end{bmatrix} \quad (38)$$

Note that these eigenvalues are purely imaginary. This will be helpful later. Our change of basis matrix is  $V = \begin{bmatrix} -j\sqrt{\frac{L}{C}} & j\sqrt{\frac{L}{C}} \\ 1 & 1 \end{bmatrix}$ , so we can define our change of basis as  $\vec{y}(t) = V^{-1}\vec{x}(t)$ . Note that the new diagonal system will be

$$\frac{d}{dt}\vec{y}(t) = \begin{bmatrix} j\frac{1}{\sqrt{LC}} & 0 \\ 0 & -j\frac{1}{\sqrt{LC}} \end{bmatrix} \vec{y}(t) + V^{-1}\vec{b}u(t) \quad (39)$$

$$= \begin{bmatrix} j\frac{1}{\sqrt{LC}} & 0 \\ 0 & -j\frac{1}{\sqrt{LC}} \end{bmatrix} \vec{y}(t) + \left( \begin{bmatrix} -j\sqrt{\frac{L}{C}} & j\sqrt{\frac{L}{C}} \\ 1 & 1 \end{bmatrix}^{-1} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \right) u(t) \quad (40)$$

$$= \begin{bmatrix} j\frac{1}{\sqrt{LC}} & 0 \\ 0 & -j\frac{1}{\sqrt{LC}} \end{bmatrix} \vec{y}(t) + \begin{bmatrix} \frac{1}{2LC} \\ \frac{1}{2LC} \end{bmatrix} u(t) \quad (41)$$

so our system of equations is

$$\frac{d}{dt}y_1(t) = j\frac{1}{\sqrt{LC}}y_1(t) + \frac{1}{2LC}u(t) \quad (42)$$

$$\frac{d}{dt}y_2(t) = -j\frac{1}{\sqrt{LC}}y_2(t) + \frac{1}{2LC}u(t) \quad (43)$$

$$(44)$$

Recall that  $\vec{x}(0) = \vec{0}$ , so  $\vec{y}(0) = \vec{0}$  (where  $\vec{0}$  is a vector of all zeros). Solving this differential equation now, we get

$$y_1(t) = \underbrace{y_1(0)}_0 e^{j\frac{1}{\sqrt{LC}}t} + \int_0^t e^{j\frac{1}{\sqrt{LC}}(t-\theta)} \left( \frac{1}{2LC}u(\theta) \right) d\theta \quad (45)$$

$$y_2(t) = \underbrace{y_2(0)}_0 e^{-j\frac{1}{\sqrt{LC}}t} + \int_0^t e^{-j\frac{1}{\sqrt{LC}}(t-\theta)} \left( \frac{1}{2LC}u(\theta) \right) d\theta \quad (46)$$

Simplifying and stacking the solutions in vector form,

$$\begin{bmatrix} v_C(t) \\ i_L(t) \end{bmatrix} = \vec{x}(t) = V \begin{bmatrix} \frac{1}{2LC}e^{j\frac{1}{\sqrt{LC}}t} \int_0^t e^{-j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \\ \frac{1}{2LC}e^{-j\frac{1}{\sqrt{LC}}t} \int_0^t e^{j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \end{bmatrix} \quad (47)$$

2.(b)iii:

We wish to show  $\vec{x}(t)$  is unbounded, given some bounded input  $u(t)$ . When showing a vector is bounded, we can show that all of its individual, scalar entries are bounded. Alternatively, when showing a vector is unbounded, it is enough to show that one of its entries will be unbounded. Note that  $i_L(t) = y_1(t) + y_2(t)$  (which we see by computing  $\vec{x}(t) = V\vec{y}(t)$ ). We can show that this quantity is unbounded. Recall that

$$y_1(t) = \frac{e^{j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{-j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \quad (48)$$

$$y_2(t) = \frac{e^{-j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \quad (49)$$

$$\implies i_L(t) = \frac{e^{j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{-j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta + \frac{e^{-j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{j\frac{1}{\sqrt{LC}}\theta} u(\theta) d\theta \quad (50)$$

Now, we have to make some choice of a bounded input  $u(t)$  so the entire term is unbounded as  $t \rightarrow \infty$ . We can choose  $u(t) = e^{-j\frac{1}{\sqrt{LC}}t} + e^{j\frac{1}{\sqrt{LC}}t} = 2 \cos\left(\frac{1}{\sqrt{LC}}t\right)$  which is a bounded sinusoidal function. We can first compute  $i_L(t)$  with this input:

$$i_L(t) = \frac{e^{j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{-j\frac{1}{\sqrt{LC}}\theta} \left( e^{-j\frac{1}{\sqrt{LC}}\theta} + e^{j\frac{1}{\sqrt{LC}}\theta} \right) d\theta + \frac{e^{-j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t e^{j\frac{1}{\sqrt{LC}}\theta} \left( e^{-j\frac{1}{\sqrt{LC}}\theta} + e^{j\frac{1}{\sqrt{LC}}\theta} \right) d\theta \quad (51)$$

$$= \frac{e^{j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t 1 + e^{-j\frac{2}{\sqrt{LC}}\theta} d\theta + \frac{e^{-j\frac{1}{\sqrt{LC}}t}}{2LC} \int_0^t 1 + e^{j\frac{2}{\sqrt{LC}}\theta} d\theta \quad (52)$$

$$= \frac{e^{j\frac{1}{\sqrt{LC}}t}}{2LC} \left( t + \frac{1 - e^{-j\frac{2}{\sqrt{LC}}t}}{j\frac{2}{\sqrt{LC}}} \right) + \frac{e^{-j\frac{1}{\sqrt{LC}}t}}{2LC} \left( t + \frac{e^{j\frac{2}{\sqrt{LC}}t} - 1}{j\frac{2}{\sqrt{LC}}} \right) \quad (53)$$

$$= \frac{t}{LC} \left( \frac{e^{j\frac{1}{\sqrt{LC}}t} + e^{-j\frac{1}{\sqrt{LC}}t}}{2} \right) + \frac{1}{\sqrt{LC}} \left( \frac{e^{j\frac{1}{\sqrt{LC}}t} - e^{-j\frac{1}{\sqrt{LC}}t}}{2j} \right) \quad (54)$$

$$= \frac{t}{LC} \cos\left(\frac{t}{\sqrt{LC}}\right) + \frac{1}{\sqrt{LC}} \sin\left(\frac{t}{\sqrt{LC}}\right) \quad (55)$$

Notice that the cos and sin terms are bounded, but the cos term is multiplied by a  $t$ , so as  $t \rightarrow \infty$ ,  $i_L(t) \rightarrow \infty$ . Hence, the system is unstable. Generally, we say a system with eigenvalues having negative real part implies stability. Here, the real part of the eigenvalues is 0, so the system is unstable.

- (c) Thus far, we have dealt with continuous systems so it also makes sense to consider discrete systems. Consider the discrete system

$$x[i+1] = 2x[i] + u[i] \quad (56)$$

with  $x[0] = 0$ .

**Is the system stable or unstable? If unstable, find a bounded input sequence  $u[i]$  that causes the system to “blow up”.**

**Solution:** Notice that, if we had the system

$$x[i+1] = 2x[i] \quad (57)$$

then we can write  $x[i+1] = 2^i x[1]$ . So, if we can somehow make  $x[1]$  nonzero using a bounded input (e.g. equal to 1, for simplicity), then as  $i \rightarrow \infty$ ,  $x[i+1] \rightarrow \infty$ . We know that  $x[0] = 0$ , and that  $x[1] = 2x[0] + u[0] = u[0]$ . Hence, we can set  $u[0] = 1$  and then  $x[1] = 1$ . We have achieved what we wanted, i.e. to make  $x[1]$  a nonzero value using the bounded input  $u[0] = 1$ . Now, for the other timesteps  $i > 0$ , we can set  $u[i] = 0$  since that would leave us with the system in eq. (57). Written explicitly, our bounded input is

$$u[i] = \begin{cases} 1 & i = 0 \\ 0 & i > 0 \end{cases} \quad (58)$$

**Contributors:**

- Anish Muthali.
- Neelesh Ramachandran.
- Anant Sahai.
- Regina Eckert.
- Kareem Ahmad.
- Sidney Buchbinder.